

INSTALLATION MANUAL

OCTOPUS Type 2 RFB Module
Mechanical Drives

OC15278



Revision History

Revision	Description
A	Released in Book Format
B	See DCR # 0357

© 2009 Octopus Products Inc. All rights reserved.

The information contained in this document is the sole property of Octopus Products Inc. Any reproduction in part or whole without the written permission of Octopus Products Inc. is prohibited. Octopus Products Inc will nor be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this document.

Contents

A1	Rudder Feed Back Signal - Overview	5
A2	Octopus – RFB Modules	5
A3	Octopus – RFB Options	5
B	Dipswitch Setting	6
C	Specific Module Selection	7
D	Calibration	8
E	Signal Cable Hook Up	9
F	Signal Cable Hook Up (Simrad Pilots Only)	10
G	Maintenance	10

A1. RUDDER FEED BACK SIGNAL - OVERVIEW:

All of the major Autopilot manufacturers offer systems that are capable of operating without a Rudder Feed Back (RFB) signal input to the course computer. To achieve satisfactory performance; there may be speed or other limitations. There is no question in the industry that the addition of a RFB enhances the performance of the Autopilot system and enables the addition of a Rudder Angle Indicator instrument to the display.

A2. OCTOPUS – RFB MODULES:

Type 2 RFB Modules can very easily be fitted to all Octopus Mechanical Drive Systems. The installation and calibration takes literally minutes to complete and the module housing is extremely robust. There are no delicate brackets and mechanisms to install and maintain.

A3. OCTOPUS – RFB OPTIONS:

Octopus offers 2 types of RFB Modules.

1. Universal RFB – OC15SUK27


The Universal RFB can be adjusted to operate with Autopilots from all of the major manufacturers. The module is equipped with a DIP switch; adjusting the switch settings is all that is required. See Table 1 for Dip Switch Settings.

2. Pilot Specific RFB – OC15SUK27A – 27B – 27D – 27E

The Pilot Specific RFB's are factory tuned to operate with Autopilots from specific manufactures. They are the most economic choice. See Table 2 for selection guide.

B. DIPSWITCH SETTING:

Dip Switch

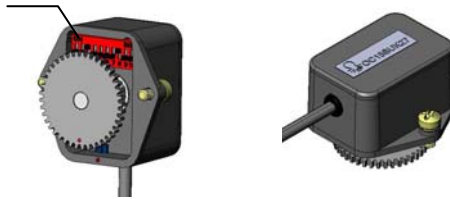

Universal RFB Module

Table 1											
Auto Pilot Manufacturer	Dipswitch Setting										**Resistance
Furuno Navman TMQ	*									*	1 Kohm
		*	*	*	*	*	*	*	*	*	
	1	2	3	4	5	6	7	8	9	10	
Raymarine		*							*		2.5 Kohm
	*		*	*	*	*	*	*	*	*	
	1	2	3	4	5	6	7	8	9	10	
*Simrad Coursemaster			*					*			3 Kohm
	*	*		*	*	*	*		*	*	
	1	2	3	4	5	6	7	8	9	10	
Comnav Si-TEX				*			*				4 Kohm
	*	*	*		*	*		*	*	*	
	1	2	3	4	5	6	7	8	9	10	
* Simrad Auto Pilots require the addition of PCB part # OC15222.											
** Fixed Resistance measured between black & red wire. Resistance between white and black wire is variable.											




Typical Dip Switch

C. SPECIFIC MODULE SELECTION:




Pilot Specific RFB


Table 2		
Part Number	Auto Pilot Manufacturer	Resistor
OC15SUK27A	Comnav – Si-Tex	4 K ohm
OC15SUK27B	Raymarine	2.5 K ohm
OC15SUK27D	Simrad - Coursemaster	3 K ohm
OC15SUK27E	Furuno – Navman - TMQ	1 K ohm

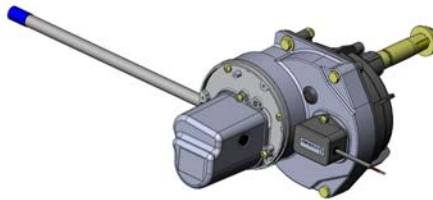

Type S Drive
Power Boat

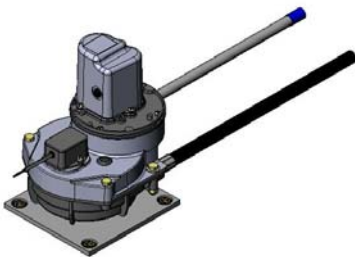

Type R Drive
Power Boat

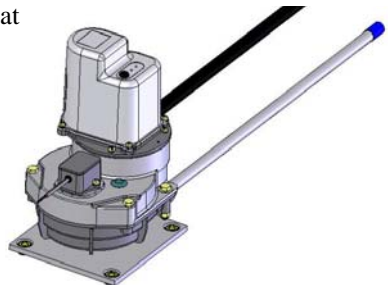

Type RS Drive
Sail Boat


Typical Complete Installations

D. CALIBRATION:

1. Disassemble the RFB module from the drive housing, by removing 2 attach screws.
2. Complete the installation of the drive unit into the vessel and install the remote steering cable following the drive installation guide.
3. Complete the electrical hook up of the drive following the drive-autopilot installation guide.
4. Complete the electrical hook up of the RFB module following the drive-autopilot installation guide.
5. Center the gear on the RFB module by aligning the red paint mark on the gear with the red paint mark on the housing as shown in underside view graphic below.
6. By turning the steering wheel of the helm unit, centre the rudder.
7. Reassemble the RFB module to the drive housing and install and tighten the 2 attach screws. Ensure that the mesh between the RFB module and the drive gear is not excessive.
8. See Auto Pilot installation guide for instructions on additional software controlled RFB fine calibration and HO limitation.



RFB Module

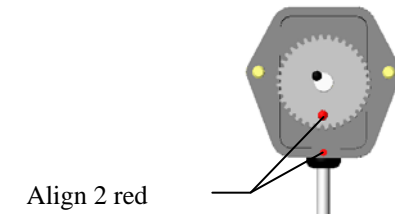


Align 2 red
Dots vertically

Underside View

E. SIGNAL CABLE HOOK UP (not for Simrad Pilots):

1. Connect Octopus RFB Module wires to Auto Pilot Junction Box following Auto Pilot installation and wiring diagram. See Table 3 for wire colour code conversions for common Auto Pilot Brands.
2. Perform electrical and calibration testing following Auto Pilot installation guide.

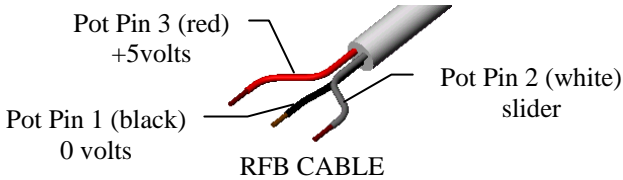

OCTOPUS	RAYMARINE	NAVMAN	TMQ
Red	Red	Orange	Red
Black	Blue	Black	Blue
White	Green	Blue	Green
Shield	Silver	Black	Black

F. SIGNAL CABLE HOOK UP (Simrad Pilots Only):

1. It is **IMPORTANT** that all wire connections are made between the RFB Module – Signal Conversion Module – Course Computer before switching power on to the Course Computer. Failing to follow this will result in the RFB signal not being recognized by the Course Computer. If this occurs - perform the **“Auto Pilot Reset”** procedure to continue.
2. When integrating with Simrad Auto Pilots - the RFB Module OC15SUK27D **MUST** be used in conjunction with the Signal Conversion Module OC15SUK83.
3. Determine suitable site to mount the Signal Conversion Module. Shorten or insert suitable extension cable as required to suit the installation.
4. Splice the RFB Module output & Signal Conversion Module input cable wires together. Like colour to like colour – insulate and protect.
5. Connect Octopus Signal Conversion Module output wires to Auto Pilot Junction Box following Auto Pilot installation and wiring diagram.
6. Perform electrical and calibration testing following Auto Pilot installation guide.

TABLE 4			
OCTOPUS			SIMRAD
OC15SUK27D	OC15SUK83		AC12 – AC42
OUTPUT	INPUT	OUTPUT	INPUT
Red	Red	Shield	Shield
White	White	Brown	Brown
Black	Black	White	White
Shield	Shield	n/a	n/a

F. MAINTENANCE:

No maintenance is required for this product.